

(9)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 379 828
A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 89480135.1

(22) Int. Cl. H01J 37/32, H05H 1/48

(23) Date of filing: 19.12.89

(24) Priority: 25.01.89 US 581933

(25) Date of publication of application:
01.08.90 Bulletin 90/31

(26) Designated Contracting States:
DE FR GB

(27) Applicant: International Business Machines
Corporation
Old Orchard Road
Armonk, N.Y. 10504(US)

(28) Inventor: Coultas, Dennis Keith
3 Oak Ridge Road
Hopewell Junction New-York 12533(US)
Inventor: Keller, John Howard
18 Henmon Boulevard
Poughkeepsie New-York 12603(US)


(29) Representative: Tubiana, Max
Compagnie IBM France Département de
Propriété Industrielle
F-95840 La Garenne

(30) Radio frequency induction/multipole plasma processing tool.

(31) A dry processing apparatus for plasma etching or deposition includes a chamber for plasma processing having an external wall for housing a work piece with a surface to be plasma processed. A source of an induction field is located outside the chamber on its opposite side from the work piece. A radio frequency induction field applied to the chamber generates a plasma. The plasma is confined within the external wall in the chamber by magnetic dipoles providing a surface magnetic field for confining the plasma. The surface magnetic field is confined to the space adjacent to the external wall. An R.F. generator provides an R.F. generated bias to the work piece. The chamber is lined with a material inert to a plasma or noncontaminating to the work piece, and the induction source in the form of a spiral or involute shaped induction coil is located on the exterior of the liner material on the opposite side of the chamber from the work piece. Distribution of gas to the chamber is uniform because a manifold located about the periphery of the chamber and an orifice formed by the surface of the chamber and the manifold admits gas from the manifold into the chamber at a uniform pressure about the periphery

of the cover of the chamber. A surface magnetic field can be positioned adjacent to the induction coil to confine the field at the top of the chamber. A capacitive or inductive reactance can be connected in series with the induction coil to adjust the R.F. generated bias.

FIG. 1



RADIO FREQUENCY INDUCTION/MULTIPOLE PLASMA PROCESSING TOOL

BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates to apparatus for plasma processing of substrates, and more particularly to subtractive (etching) and additive (deposition) processing of electronic circuit chips and packaging materials.

Technical Problem

The problem with capacitive coupling of R.F. energy to a plasma employed for etching or depositing films is that to increase power to the level required to generate the plasma required, the voltage will be so high that the charged particles in the plasma will be accelerated to an excessive level of kinetic energy and will tend to sputter the work piece and to etch or sputter away any masks. The effect will be to chamfer the mask opening, to increase the size of openings in masks by etching the edges of the masks. The effect also leads to ion damage and loss of selectivity. This is unacceptable as the requirements in the art are to decrease the size of openings as dimensions are decreasing in microelectronics. Instead one would like the flexibility of varying the ion energy according to the desired process.

Related Art

U.S. patent 3,705,091 of Jacob for "Gas Discharge Apparatus" shows a cylindrical glass reaction chamber coarsely wound with a helical R.F. coil energized by high frequency (13.5 mhz) R.F. to generate a plasma in a vacuum for etching of a tray of semiconductor slices. The system operates in the 1 Torr pressure range and produces mainly reactive radicals. The Jacob system does not operate in the desired reactive ion etching, RIE mode of this invention. In the pressure range desired for the present invention of 1 to 50 mTorr, the Jacob system would produce very non-uniform and very slow etching. No means for confining the plasma is shown.

M. G. Vaila, K. W. Ehlers, D. Kippenhan, P. A. Pincosy, and R. V. Pyle "Development of R.F. Plasma Generators for Neutral Beams", J. Vac. Sci. Technol. A 3(3), (May/Jun 1985) pp 1218-1221 describes an R.F. plasma source used to generate

a high power neutral beam to heat a large fusion plasma to reaction temperatures. The pressure is from 1 to 20 mTorr. A plurality of magnetic dipoles surround the ri bucket chamber to create a magnetic shield for the plasma. There is no reference to additive or subtractive treatment of a substrate. Vaila et al teaches the use of R.F. induction for plasma production, but it does not teach the use of R.F. induction for etching or deposition where the plasma will etch the coating on an R.F. coil and coat the insulators.

R. Lingpecher and K. R. MacKenzie, "Magnetic Multipole Containment of Large Uniform Collisionless Quiescent Plasmas", Rev. Sci. Instrum., Vol. 44, No. 6, (June 1973) 726-731 discusses the use of magnetic multipoles for confinement of a plasma of argon at a pressure of 0.002 Torr. This reference is one of the original papers on multipole confinement of the primary electrons in plasma production from electron emission from a hot filament, U.S. patent No. 4,483,737 of Mantel, "Method and Apparatus for Plasma Etching a Substrate" uses an electrically heated filament to emit electrons, but states at Col. 5, lines 59-65, that a hollow cathode or ion cyclotron resonance can be used to generate electrons. Later, it states that R.F. power sources are not used for the discharge current or for generation of the surface magnetic field confining the plasma. At Col. 6, lines 52-68, it states "The plasma is produced by impact from fast ionizing electrons drawn from a set of heated tungsten filaments, rather than by an applied rf voltage."

See also T. D. Mantel and T. Wicker, "Plasma Etching with Surface Magnetic Field Confinement" Appl. Phys. Lett. 42(1), (1 July 1983) pp. 84-86, and T. D. Mantel and T. Wicker, "Low Pressure Plasma Etching with Magnetic Confinement", Solid State Technology (April 1985) pp. 263-265.

I. Lin, D.C. Hinson, W. H. Chao, R. L. Sandstrom, "Low-Energy High Flux Reactive Ion Etching by R.F. Magnetron Plasma", Appl. Phys. Lett. Vol. 44 (Jan. 15 1984) pp. 185-187 describes magnetic confinement of a plasma and R.F. power being used for plasma production. The R.F. power is capacitively coupled to a copper pitem used as an electrode. This is one of many magnetron reactive ion etching systems. Most of them involve an effort to achieve uniformity from a system in which the electron density increases in the direction of $E \times B$ drift of secondary electrons from the cathode. These systems also provide limited adjustability of the energy of the ions striking a wafer.

U.S. patent No. 4,832,719 of Chow et al for "Semiconductor Etching Apparatus with Magnetic

"Array and Vertical Shield" describes etching a semiconductor wafer in an R.F. field in argon gas. A pair of rings of concentric dipoles above the wafer create a pair of rings in the plasma above the wafer. This leads to the kind of lack of uniformity of the plasma which would be avoided in systems required to provide uniform etching or deposition. Thus the Chow et al patent would kind one in the opposite direction from the purpose to which this invention is directed.

U.S. patent No. 4,384,938 "Reactive Ion Etching Chamber" of B. Dasletis et al describes a reactive ion etching tool having a cylindrical reactive ion etching chamber acting as an anode and a plate arrangement acting as a cathode and wherein an R.F. signal applied between cathode and anode acts to produce an active glow region within the chamber with a dark space existing over the internal surfaces thereof. A reactive ion etching chamber structure has an internal top surface and sidewall surfaces forming a physically symmetrical arrangement with respect to the cathode plate positioned between the sidewall surfaces below the top surface, the top surface and surfaces being uniform except for gas input and exhaust ports with the gas exhaust ports having an opening dimension less than the thickness of the dark space existing over the internal surfaces.

See also Keller et al U.S. Patent No. 4,338,177 for "Multipole Implantation Isotope Separation Ion Beam Source".

Object of this invention are

- a) a uniform plasma,
- b) plasma density which does not saturate with power,
- c) control of ion energy,
- d) high etch rates for a given power level, and
- e) relative simplicity.

In accordance with this invention, dry processing apparatus for plasma etching or deposition includes a chamber for plasma processing having an external wall for housing a work piece with a surface to be plasma processed in a gas. A source of an induction field is located outside the chamber on its opposite side from the work piece. A radio frequency (R.F.) induction field applied to the chamber generates a plasma in the gas. The plasma is confined within the external wall in the chamber by magnetic dipoles providing a surface magnetic field for confining the plasma. The surface magnetic field is confined to the space adjacent to the external wall. An R.F. generator provides an R.F. generated bias to the work piece. The chamber is lined with a material inert to a plasma of noncontaminating to the work piece, and the induction source in the form of an inductor or spiral induction coil is located on the exterior of the liner

material on the opposite side of the chamber from the work piece. Delivery of and distribution of the gas to the chamber is uniform about the periphery of the top cover because a manifold is located about the periphery of the chamber. An orifice for controlling the gas pressure of the gas being admitted to the chamber is formed by the surface of the chamber and the manifold admits gas from the manifold into the chamber at a uniform pressure about the periphery of the cover of the chamber. Preferably a surface magnetic field is positioned adjacent to the induction coil to confine the field at the top of the chamber. It is further preferred that a capacitive or inductive reactance be connected in series with the induction coil to adjust the R.F. generated bias.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a sectional view of a plasma treatment system in accordance with this invention.

FIG. 2 shows a magnetic multipole arrangement for confinement of a plasma in accordance with this invention.

FIG. 3 shows a schematic diagram of some elements of the plasma system of FIG. 1.

FIG. 4 shows a plan view of the inductor or spiral shaped R.F. induction field coil in the system of FIG. 1 in accordance with this invention.

FIG. 5 is a graph of ion current vs R.F. power for three plasma processing systems.

DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. 1 shows apparatus 8 which includes an evacuated chamber 10 containing a semiconductor wafer 11 that comprises a work piece 12 to be treated with a plasma process. A gas is admitted to chamber 10 from annular manifold 14 via annular orifice 15. The gas is used to form a plasma for processing of wafer 11 by etching or deposition. A liner 16 forming a cylindrical outer wall contains the gas which is to be energized to form a plasma.

Preferably, liner 16 is composed of quartz or another material which is nearly, i.e. substantially, inert or noncontaminating to the plasma to be contained in plasma processing chamber 10. The cover 17 of the chamber 10 is composed of quartz also. Thus the chamber 10 is surrounded by quartz lined liner 16 and cover 17 on the side and the top with the wafer 11 on the bottom. The wafer 11 is supported on metallic base 23, and is insulated therefrom by an insulating coating on the upper surface of base 24. A flat insulating ring 40 is

provided on top of base 23 at the periphery of the water 11 and with an indentation 32 for supporting the edges of water 11. Ring 40 separates the plasma from the surfaces below, and it is shown shaped with indentation 32 to retain the water 11 in a central position at the base of chamber 10.

The gas is admitted to the chamber 10 from gas input port 12 through line 13 to annular manifold 14 formed by annular base 27 and the cover 17. The manifold 14 is about 0.275 inches deep. The manifold 14 is connected to chamber 10 through a circumferential, narrow annular orifice 15 of about 0.005 inches which maintains sufficient pressure of the gas in manifold 14 that the gas is distributed at a relatively uniform pressure about the entire circumference of the top of chamber 10. The gas in manifold 14 passes through orifice 16 between the top of the lip of annular base 27 and the lower surface of cover 17 in substantially equal quantities per unit time all about the circumferential area, i.e. the periphery, at the top of chamber 10 so that the plasma will be more highly uniform within the chamber 10. Preferably, the pressure of the gas in chamber 10 is at a low pressure of about 1-6 mTorr. The gas to be exhausted from chamber 10 passes through annular orifice 18 at the base of the liner 19 or between magnets 21 into exhaust vacuum pumping manifold 19 and out through port 89, which is connected to vacuum pumps (not shown for convenience of illustration.)

Apparatus to provide magnetic confinement of the plasma is employed in the form of multiple magnetic dipoles (multipoles) 21 with vertical axes as shown in FIGS. 1, 2 and 3. The multipoles 21 have their fields directed at right angles towards the vertical axis of the cylindrical chamber 10. Multipoles 21 are arranged about the periphery of liner 19 in the classic magnetic confinement cylindrical arrangement. The multipoles have their magnetic field directed inwardly as indicated by the plan view in FIG. 2. With this arrangement the alternating of the north and south poles (of multipoles 21) directed inwardly, looking down as in FIG. 2, provides a wall of magnetic field forces which repel electrons back into the interior of chamber 10, thereby reducing the number of activated ions striking the walls and varying the uniformity of concentration of the plasma near the water 11. As can be seen in FIG. 2, the magnetic field contains cusps 20 pointing towards the multipoles 21. It will be obvious to those skilled in the art that magnets 21 can provide cylindrical cusps instead of line cusps. A radio frequency induction (R.F.) coil 22 is wound in a spiral or involute form on top of quartz cover 17 of chamber 10 as shown in FIG. 4. The coil 22 is energized by a 13MHz radio frequency source 30 with a power of about 300 watts per amp of loss of the gas. Source 30 is

connected by line 38 to the outer end of coil 22 at terminal 47. The other end of source 30 is also connected to ground completing the circuit. The inner end of spiral coil 22 is connected at terminal 28 by line 48 through switch 49 and line 39 to a bond 29 on the grounded wall 31 of apparatus 9 which is at electrical ground.

Referring to FIG. 3, for higher density plasmas, magnetic multipole confinement by magnets 32 located above cover 17 on its surface can be added adjacent to coil 22 to reduce the plasma loss to cover 17.

Switch 49 shorts out lines 48 and 51 which connect a reactance 50 in series with R.F. coil 22. Reactance 50 can be a variable or fixed reactance which is capacitive or inductive, as desired, to adjust the R.F. bias on the plasma. The connection of reactance 50 in series with coil 22, between terminals 28 and ground connection 20, is employed for the case where one is using the R.F. coil 22 alone, i.e. not using R.F. bias from source 24. Reactance 50 is useful in a case in which it is desired to use R.F. induction without the R.F. bias from source 24. In this case one can vary the ion energy over a somewhat smaller range 10eV to 80 eV. In accordance with this aspect of the invention one varies the impedance to ground (from the center of the coil 22, bypassing line 39 when switch 49 is opened to close the circuit to ground through reactance 50 and lines 48, 51 and 39 as well as bond 29). This allows one to go from the smallest amount of capacitive coupling (equivalent to middle turn 34 being at R.F. ground potential) with a value of capacitive impedances equal to one half of the coils inductive impedances to somewhat more capacitive coupling for reactance 50 being inductive.

Referring to FIG. 4, coil 22 includes a spiral with terminals, tapered holes comprising terminals 28 and 47 respectively for joining lines 28 and 39 to coil 22. Coil 22 is shown having three turns with the second (middle) turn 34 from transition 33 to transition 35 being substantially wider to enhance the inductive qualities of the coil 22. Both the outer turn 36 and the inner turn 37 are of about the same width. The advantage of this design is that the plasma is more uniform between the second (middle) turn 34 than it would be with a coil with a single width. In general this principle applies regardless of how many turns are involved. What is involved with the variation in width (i.e. cross-sectional area) is that the inductances of the three turns are rebalanced.

The R.F. energy from the coil 22 ionizes the gas in chamber 10 into a sustained plasma for additive or subtractive processing of the water 11. The water 11 is supported on metallic base 23. Metallic base 23 cools water 11 with electrostatic

damping and backside cooling not shown for convenience of illustration, but as is well understood by those skilled in the art. Base 23 is connected to an R.F. biasing source 24 at a frequency above about 13 MHz, preferably at 40 MHz which sets up an R.F. bias between the wafer 11 and the plasma, leading to a D.C. bias on the wafer 11. The use of different frequencies reduces coupling between the two power supplies. The high frequency R.F. bias gives a more monotonous distribution of ion energy, so there is improved control of ion energy for better selectivity of the rate of etching.

This R.F. bias provides ion energy control of the ions from the plasma as the R.F. level of the base 23 is varied by R.F. source 24. A dark space exists upon the upper surface of the wafer 11. The use of R.F. coil 22 instead of a capacitively coupled R.F. electrode to generate the plasma affords the advantage of inducing and controlling the kinetic energy of the ions striking the walls of liner 18 and wafer 11, thereby reducing the damage that can be done by ions and electrons at the high energy levels required for plasma processing contemplated for use with this apparatus. This also gives the flexibility of adjusting the ion energy according to process needs.

In the exhaust manifold or chamber 18 are located cylindrical walls of vertical screening 25 which extends from top to bottom in chamber 19 and a shorter wall of screening 26 which extends from the bottom of annular base 27 to the bottom of chamber 19. Screening 26 and 28 are included to provide grounded surfaces which will prevent the plasma from extending far into the manifold 18. Nylon bolts 42 secure base 23 to apparatus 2 with the O-ring gasket 41 sealing the chamber 10 from the atmosphere.

Gases suitable for use in forming the plasma are well known and some of them are listed as exemplary gases. $\text{CCl}_2\text{F}_2 + 20\% \text{SF}_6$

$\text{C}_2\text{F}_6 + 18\% \text{SF}_6$

C_2F_6

CF_4

O_2

$\text{Ar} + 10\% \text{O}_2$

FIG. 5 is a graph of ion current vs R.F. power for three plasma processing systems. One curve is for R.F. power supplied to induction coil 22 employed in the instant embodiment, which produces a linear curve. As is well known to those skilled in the art, the dotted curve in FIG. 5 is for a system in which the plasma is generated by a particular electrocyclotronresonance (ECR) device.

The other dotted curve is for a system in which the plasma is formed by an R.F. diode, i.e. capacitively coupled R.F. It can be seen that at higher power levels, the R.F. induction produces for higher ion current at a given power level plus a linear rate

of increase which are both preferred characteristics. Ion current does not saturate as power increases, so very high plasma densities can be achieved at low ion kinetic energies.

This system and method is useful for both plasma etching and plasma coating processes, particularly in fields such as large scale integrated semiconductor devices and packages thereof. Other fields requiring microfabrication will also find use for this invention.

In plasma annealing of gate oxides or oxide isolation, one should avoid any peak-to-peak voltages above the "K alpha" energies of carbon, nitrogen and oxygen which are about 283, 401 and 532 respectively. Consequently, one desires a high density of atomic and ion hydrogen. This is very difficult to achieve employing capacitively coupled R.F., even in the magnetron modes. We have found that it is easily achieved when employing an R.F. inductively coupled plasma.

This system can replace wet HF solutions for etching of thin layers.

Claims

1. A plasma dry processing apparatus characterized in that it includes : - a chamber for plasma processing having an external wall, said chamber containing within said wall at least one work piece having a surface to be processed in a plasma, - induction means for providing a radio frequency induction field within said chamber for generating a plasma within said chamber,

- confining means for providing a surface magnetic field for confining said plasma within said chamber, said surface magnetic field being substantially confined to the space adjacent to said external wall.

2. Apparatus in accordance with claim 1 including radio frequency energization means for providing a R.F. generated bias to said work piece.

3. Apparatus in accordance with claim 1 wherein said induction means is located on the exterior of said chamber.

4. Apparatus in accordance with claim 3 wherein said induction means is located on the opposite side of said chamber from said work piece.

5. Apparatus in accordance with claim 1 wherein said chamber is lined with a liner material substantially inert to a plasma or substantially non-contaminating to said work piece and said induction means is located on the exterior of said liner material on the opposite side of said chamber from said work piece.

6. Apparatus in accordance with claim 1 characterized in that it includes :

- manifold means located about the periphery of said chamber, and

- orifice means located between the surface of said chamber and said manifold means for admitting said gas from said manifold into said chamber, whereby said gas is admitted to said chamber from said manifold with a substantially uniform pressure.

7. Apparatus in accordance with claim 3 including means for providing a surface magnetic field positioned adjacent to said induction means.

8. Apparatus in accordance with claim 1 including reactance means connected in series with said induction means, whereby one can produce and adjust a radio frequency generated bias.

9. A reactive ion etching system including :

- cylindrical etching chamber formed by an electrode structure, a chamber top and sidewalls, - an R.F. biased structure for supporting the workpieces to be processed, and

- means for applying an R.F. induction field to produce in the active plasma etching portion of the chamber a glow region which is separated from the internal chamber surfaces by means for providing a distributed magnetic confinement field about the periphery of said chamber.

10. A plasma dry processing apparatus including :


- a chamber for plasma processing having an external wall, said chamber containing within said wall at least one work piece having a surface to be processed in a plasma,

- induction means for providing a radio frequency induction field within said chamber for generating a plasma within said chamber,



- induction means is located on the exterior of said chamber, and said induction means is located on the opposite side of said chamber from said work piece.

11. Apparatus in accordance with claim 10 including reactance means connected in series with said induction means, whereby one can adjust said R.F. generated bias.

12. Apparatus in accordance with claim 11 wherein said chamber is lined with a liner material substantially inert to a plasma or substantially non-contaminating to said work piece and said induction means is located on the exterior of said liner material on the opposite side of said chamber from said work piece.

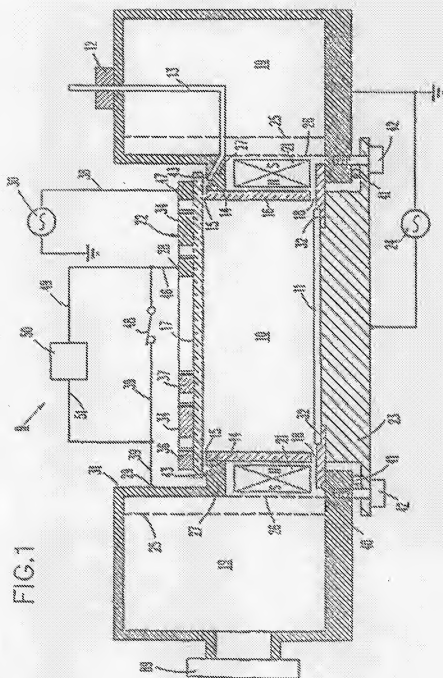

၇၆၆

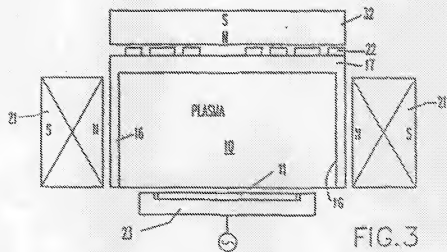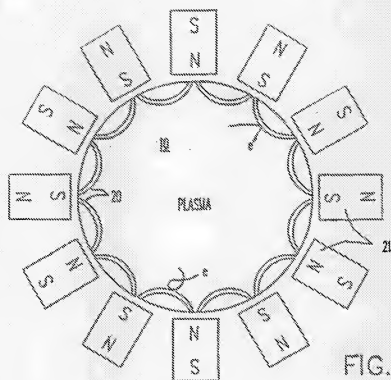

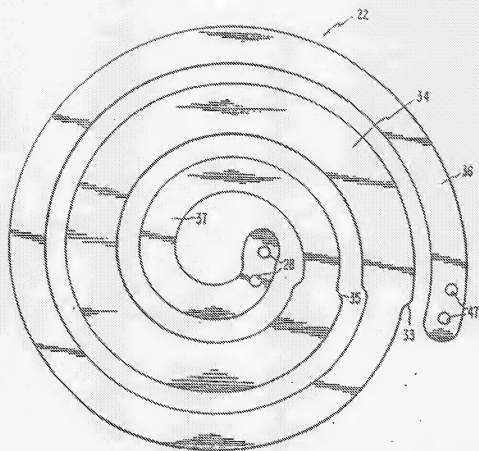


FIG. 4

FIG. 5

